TD195
R63R562
1994

RIPARIAN ROAD GUIDE

Managing Roads to Enhance Riparian Areas

COVER PHOTOGRAPH:
A restoration project in progress on Diener Canyon Road, Bluewater Creek, Cibola National Forest.

All photographs in this text are courtesy of USDA Forest Service, Southwestern Region.

RIPARIAN ROAD GUIDE

Managing Roads to Enhance Riparian Areas

Produced by

Terrene Institute
Washington, D.C.

In cooperation with

U.S. Environmental Protection Agency
Region 6 Water Management Division
Water Quality Management Branch
Dallas, Texas

USDA Forest Service
Southwestern Region
Albuquerque, New Mexico

©1994 Terrene Institute

LIBRARY COPY
ROCKY MOUNTAIN RESEARCH STATION
FORT COLLINS CENTER

TD195
R63R562
1994

Acknowledgments

For review of this guide, we are grateful to Jean Spooner, North Carolina State University; Lynne Kolze, Minnesota Department of Pollution Control; William Zeedyk, USDA Forest Service (retired); Tom Davenport, U.S. Environmental Protection Agency, Region 5; Jim Meek, U.S. Environmental Protection Agency, Liaison to U.S. Department of Agriculture; Jim Piatt and Delbert Trujillo, New Mexico Environment Department; Elbert Moore, U.S. Environmental Protection Agency, Region 10; Lyn Kirschner, Conservation Technology Information Center; and Russell LaFayette, USDA Forest Service, Liaison to U.S. Environmental Protection Agency.

This guide is based on the experiences of field staff in the Apache-Sitgreaves, Carson, Cibola, Gila, and Prescott National Forests and documented in a paper entitled "Riparian Area Enhancement through Road Design and Maintenance" by Russell A. LaFayette, John R. Pruitt, and William D. Zeedyk of the USDA Forest Service. William Zeedyk deserves special credit. His vision and enthusiasm brought these ideas into application where it counts most: in the field.

The initial draft was prepared by Tetra Tech, under U.S. Environmental Protection Agency Contract #68-C9-0013, and Susan Alexander of the Terrene Institute for the Water Quality Management Branch, Water Management Division, U.S. Environmental Protection Agency, Region 6, Dallas, Texas. The publication was produced by the Terrene Institute under a cooperative agreement with Region 6 of the U.S. Environmental Protection Agency.

For additional information and assistance, contact Russell LaFayette (4501-F), USDA Forest Service, Liaison to EPA at U.S. EPA, Fairchild Building, 499 South Capitol Street, SW, Washington, DC 20460; 202/260-7166.

Points of view expressed in this publication do not necessarily reflect the views or policies of the Terrene Institute or of any of the contributors to its publication. Mention of trade names and commercial products does not constitute endorsement of their use.

Editor, Rachel Reeder
Typesetting, Ann Slebodnik
Production Manager, Lura T. Svestka

Additional Copies Available From

Terrene Institute
1717 K Street, NW
Suite 801
Washington, DC 20006
202/833-8317 Fax: 202/296-4071

U.S. Environmental Protection Agency
Region 6, Water Management Division
1445 Ross Avenue
Dallas, TX 75202
214/655-7140

Contents



Introduction 1

Riparian Areas and Roads—A Short History 5
Riparian Degradation, a Serious Loss 6
Roads, a Major Contributor to Riparian Degradation 7

Impacts of Road Building and the Benefits of Improved Design 11
Environmental Awareness Increases 11
A Changing Perspective 13
Improved Design and Maintenance 14

Solutions to Common Problems 15
Culverts for Stream Crossings 17
Fords for Stream Crossings 23
Bridges for Stream Crossings 25
Wet Meadow Crossings 25
Road Alignment and Drainage 30

Conclusion 31
Help is Available 31

Glossary 33

Introduction

IN THE PAST, A MAIN OBJECTIVE IN ROAD DESIGN AND maintenance was to keep roads dry and safe to travel. Water was considered a liability and threat to road safety and stability, and extraordinary efforts were made to keep water off and away from roads.

Historically, roads were built following early paths and trails, frequently along streams, rivers, and lakes. Before locating roads next to waterbodies and through riparian areas—the moist vegetative lands related to or bordering on water—early road builders considered ease of travel, convenience, and safety. They did not, however, consider the environmental impact of the road on surrounding lands. As a result, traditional road design, construction, and maintenance have harmed important riparian areas and diminished water quality.

Traditional engineering practices fully drained roads and sometimes caused major undesirable changes in the environment:

- *Road building* has, in some instances, dramatically changed the water flow pattern across the landscape. Areas adjoining the roads that were formerly wet—riparian areas, wet meadows, small streams—have dried up. Where water continues to flow, its erosive force (its velocity and volume) has increased.
- *Traditional road building practices* have also changed the quality or cleanliness of the water. Previously clear waters are now muddy and turbid after rain storms.

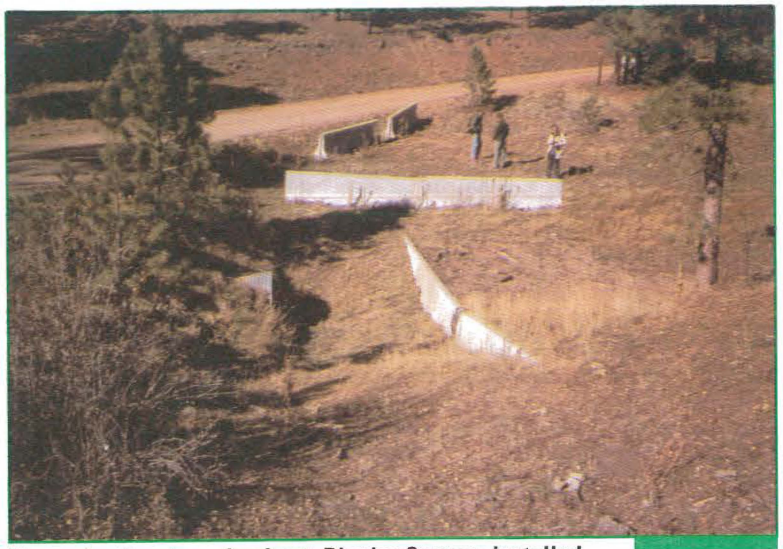

Bluewater Creek road culvert, Dienier Canyon, installed traffic barriers to restore stream level and to capture sediment. Unused barriers in the background show design setting.

- *The landscapes that border road locations* have also changed. Plants and wildlife that once thrived in moist or wet environments can no longer survive.

Action can and should be taken to improve the management of water and riparian lands as natural resources and assets. We can restore or recreate former riparian and wet areas and modify road design and maintenance to disperse rather than channelize water, thus reducing erosion, sedimentation, and other pollution.

This booklet presents a number of cost-effective road construction practices that are easy to install and maintain. Their use can help local governments maintain clean water and safe roads while simultaneously enhancing and restoring the health and value of riparian areas. The solutions recommended in section 3 highlight inexpensive retrofits of roads that periodically wash out or erode during storms. Cost information, if available, is also included.

This guide was written primarily for local government personnel, elected officials, and road designers and contractors in the arid and semiarid southwestern United States. The general principles, however, are applicable in other regions of the country if techniques are modified accordingly. It is applicable to suburban and rural road systems, less applicable to roads in heavily urbanized areas. Urban environments present unique challenges to road construction and retrofit that have not been considered here.

This guide is divided into three sections, which

- review the history of road-related impacts on riparian areas and water quality,
- describe common road and riparian area conflicts and the benefits of using modified designs, and
- suggest ways to correct existing problems and simple techniques for avoiding these problems in the future.

This meadow in Apache-Sitgreaves National Forest, Arizona, was restored by renovating a road crossing using a railroad tie and grout structure. Seventy acres were renovated for $700.

Several technical terms are used throughout this report that may have different meanings in various contexts. These terms are included in a glossary at the end of the text.

Emerald Glade in Chino Ranger District, Prescott National Forest, Arizona. Wetland renovation using small rock dam below a road to capture sediment and slow water. Note the obvious contrast between the riparian area and adjacent upland.

Riparian Areas and Roads—A Short History

RIPARIAN AREAS ARE A TRANSITIONAL, USUALLY LUSH, zone between upland ecosystems and water or aquatic ecosystems (Fig. 1). They are lands bordering streambanks or surrounding bogs, wet meadows, lakes, and ponds. These areas and related wetlands and waterbodies normally occupy a small fraction of the total land area. In the Southwest, they occupy less than 2 percent of the total landscape; however, their small size is misleading because of their high value, productivity, and diverse uses.

Figure 1.—Riparian area diagram

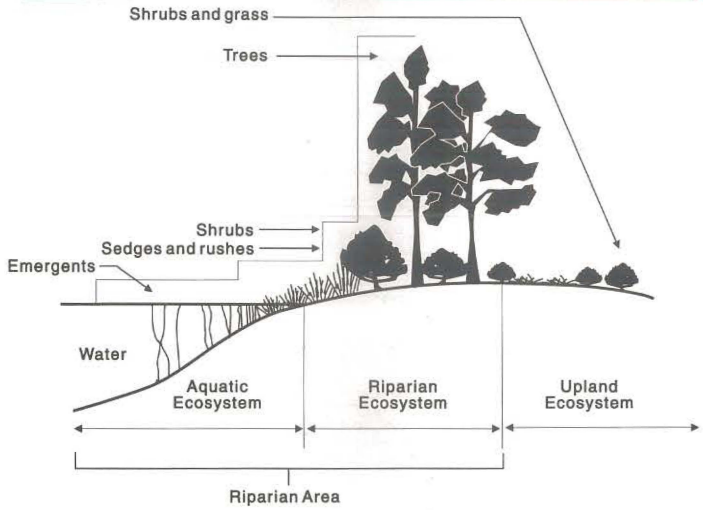

Source: Cooperative Extension Services

Riparian areas contribute many values to the watershed and the people who live in it. Most important, they diminish the severity and impact of flood events and improve water quality. Historically, riparian areas have also been the focal point for human settlement and other commercial developments. Not surprisingly, roads have often been located adjacent to streams, rivers, and riparian areas to serve these various communities.

This Apache-Sitgreaves National Forest culvert is two feet too low. A raised culvert would rewet the meadow and proper outfall would prevent gullying as well.

Riparian Degradation, a Serious Loss

Reports prepared by state and federal agencies in the Southwest indicate that approximately 50 percent of the area's original riparian acreage has been lost or significantly degraded, with corresponding changes in the quality of the rivers, streams, or lakes adjacent to these areas. Increased sedimentation and turbidity, increases in water temperature, and decreases in the dissolved oxygen content of the water have been observed and measured. In the arid Southwest, these losses of water quality and quantity are especially significant. The unique characteristics that draw human beings to riparian areas, for example, deep moist soils, gentle terrain, large shade trees, clean and ample water, and abundant wildlife, disappeared as riparian areas were filled, paved, drained, mowed, channeled, or otherwise used by the increasing population.

Many activities contributed to the degradation of riparian areas and the decline in water quality, including

- mining;
- diversions, such as dams, flood control, and channelization;
- irrigation;
- timber harvests;
- road construction and maintenance;
- domestic livestock grazing; and
- recreation.

In addition, many well-intentioned laws provided incentives for people to modify riparian areas. The value of these areas has simply not been fully understood or appreciated. In the West, for example, water use laws known as prior appropriation laws require that water be diverted from the stream and put to a "beneficial" use for humans. But leaving the water undisturbed has not been considered a beneficial use in many western states. Until recently, the beneficial uses of water for fish and recreation were ignored, and water quality issues in ephemeral or intermittent streams were not addressed.

Roads, a Major Contributor to Riparian Degradation

Road construction and maintenance activities have been major contributors to riparian area losses over the years. Early roads followed historical patterns of travel and commerce in the old West. Wagon routes often followed stream corridors because riparian areas had a gently rolling terrain, offered water and forage for horses and other

livestock, provided fish and game for food supplies, and supplied wood for fires and buildings. Early roads and highways followed these routes along stream bottoms because construction was usually easier and less expensive in the flatter terrain. Although many roads were later upgraded to carry more traffic at higher speeds, the newer roads were often built in the same location as the older ones.

Two roads converge in a wet meadow, causing loss of surface area to road and culverts, higher runoff, increased sediment movement, and reduced vegetation.

These roads were built using traditional engineering practices before anyone had considered the environmental effects of road design, construction, and maintenance. Early drainage and maintenance practices were designed simply to move water away from the road—to keep the road's surface and subsurface dry. Large drainage structures, augmented with extensive ditch networks, were preferred over numerous small structures to save initial effort and expense. Maintenance practices commonly routed water and sediments from the road surface and ditches directly into stream courses for rapid removal. This practice benefited the roads but caused unintentional harm to other resources; it eroded the adjacent riparian areas and degraded water quality.

The ecological effects of these practices on riparian areas were especially difficult to see until the roads had been traveled for a considerable time. By then, many believed that it was too late or too expensive to modify the designs. Land and resource managers are, however, beginning to realize the extent and magnitude of their activities on riparian areas, and many are taking positive steps to correct the damage.

Forest Road 480 in the Zuni Mountains, Mt. Taylor Ranger District, Cibola National Forest, New Mexico, becomes a muddy bog as vehicles become stuck and try to go around it, broadening the problem.

Forest Road 409, Apache-Sitgreaves National Forest, Arizona, after the road retrofit. A series of culverts placed across a formerly degraded meadow now spreads water, slows velocity, captures sediment and promotes plant growth to enhance the riparian area.

Impacts of Road Building and the Benefits of Improved Design

AFTER SEVERAL CENTURIES OF HABITATION AND LAND development activities, including road building, riparian areas in poor condition and dewatered meadows with deep gullies have become a common sight. Most people accept these conditions and have no vision of what the land used to look like. Until recently, little thought or action was given to correcting the situation—in fact, few people recognized the problem.

Environmental Awareness Increases

The nature and magnitude of riparian area losses related to road construction have recently been documented. Among them are the following:

- *Many acres of riparian land* are converted directly to road surface.
- *Concentrated flows* from traditional road building practices create deep gullies and dewater the riparian area.
- *Riparian plant species* yield to drier and less productive upland species, thereby decreasing plant and ecosystem diversity.
- *Accelerated runoff* (from impervious road surfaces), increased flood peaks, and abnormal flooding compromise the safety of land users and endanger adjacent facilities.

- *Streams* dry up earlier in the year or change from perennial to intermittent flow as a result of changes in the volume and duration of the base flow.
- *The loss of streambank vegetation* and the increased velocity of water flow accelerate erosion and increase downstream sedimentation.

Road construction in riparian areas can also lead to financial losses: improper road drainage contributes to higher road maintenance costs.

These effects were first recognized by wildlife and watershed managers and water quality agencies, but experienced road crews perfected the techniques discussed in this guide. To test these ideas, the U.S. Forest Service initiated demonstration projects to illustrate proper road rehabilitation techniques. The projects demonstrate practical methods to rehabilitate damaged riparian areas and reduce the environmental impacts of future roads. Section 3 of this guide summarizes information obtained from these projects, which were conducted in the national forests and grasslands of the Southwest: Arizona, New Mexico, and western Oklahoma and Texas.

Luna Ranger District, Gila National Forest. Bedrock control site in Hardcastle Creek Gully before improvements.

Luna Ranger District, Gila National Forest. Bedrock control site in Hardcastle Creek Gully seven years later. Bank shaping, check dams, and road drainage management dramatically affected the channel.

A Changing Perspective

Viewing water as an asset rather than a liability helps road designers and managers work with, rather than against, the hydrology of a site. New and retrofitted road designs detain and slow the rate of water flow in or near riparian areas or wetland sites to prevent erosion and sedimentation. When water flow is dispersed throughout the area in natural patterns, a wide range of resources and users benefit, and cost savings are realized.

To use these ideas in road design and management, consider the following approaches:

- *Locate new roads* on dry sites in the watershed to avoid unwanted environmental impacts in riparian areas.
- *Reconstruct substandard roads* so that riparian areas are protected, recreated, or rewetted.
- *Retrofit other roads* during periodic maintenance to restore the function and health of associated riparian areas and to protect water quality.

Improved Design and Maintenance

Managing roads to protect or enhance riparian areas yields a range of multiple benefits. Recreating former riparian areas by rewetting these landscapes helps restore the original watershed functions. A properly functioning watershed

- reduces flood peaks and related damages;
- prevents channel erosion and downstream sedimentation;
- traps sediments and soil nutrients;
- reduces evaporation in downstream reservoirs (by storing water in the upstream soil profile);
- increases wildlife and fisheries habitat quality, quantity, and diversity;
- increases forage production for livestock and wildlife; and
- increases recreational benefits and aesthetic values.

Further, riparian area planning reduces road maintenance cost and complies with local, state, and federal laws and regulations governing the management of floodplains and wetlands. ▮

Solutions to Common Problems

PROBLEMS RELATED TO ROAD DESIGN AND ITS EFFECTS on riparian areas and water quality can be divided into three main categories:

- stream crossings (culverts, fords, and bridges),
- wet meadow crossings, and
- road siting, alignment, and drainage.

This guide recommends several possible solutions to problems in these categories with particular attention to stream and wet meadow crossings because they present the greatest opportunities for improved water quality and enhanced riparian area function. Each of the following examples includes a problem statement, possible solutions, and specific recommendations, illustrated by simplified engineering diagrams.

Road designs to enhance or protect riparian areas are usually based on one of the following principles:

- *Multiple outlets.* Use multiple culverts placed over the width of the drainage in areas that do not have a single natural channel.
- *Proper alignment.* Align the structure with the stream direction and gradient; do not rely on artificially constructed channels because they tend to increase the gradient and accelerate the flow.

- *Proper elevation.* Place the bottom of the crossing at the level of the natural channel.
- *Drainage structures.* Avoid using supplemental ditches or drainage structures within the riparian zone.
- *Flow and infiltration.* Design the structure to pass the expected high flows and to allow appropriate infiltration.
- *Detain and retain.* Use techniques to detain water and retain sediment above the road, such as upstream dikes. Divert drainage waters into filter zones rather than directly into streams.
- *Proper location.* Avoid riparian areas entirely, if possible. Upland locations will have less impact on the environment.

A raised culvert outlet along Forest Road 480, Cibola National Forest.

Culverts for Stream Crossings

Culverts are the most frequently used stream crossing on smaller roads. They provide safe crossing for minimal initial investment; however, many culverts experience costly and repetitive maintenance problems after installation. Proper design, placement, and alignment of culvert crossings will avoid environmental problems and unnecessary maintenance costs. Chart 1 identifies common culvert problems and suggests cost-effective and environmentally beneficial solutions.

A premier example of these recommendations is the road drainage rehabilitation project in the Apache-Sitgreaves National Forests in Arizona. The retrofit involved raising the culvert's inlet using an upstream structure of railroad ties, rock, and grout. Volunteers installed the structure over a weekend. The structure captures sediment and slows runoff on an estimated 70 acres (28.3 hectares) of riparian area. Since the total cost of materials for the project was only $700, costs for the work were minimal: $10 per acre ($25 per hectare).

Apache-Sitgreaves National Forest—a completed railroad tie and rock grout structure installed to raise culvert inlet 32 inches.

CHART 1.—Retrofitting traditional culvert crossings.

Common Mistake	Resulting Environmental Problem	Solutions
One or more large culverts are often installed to minimize installation effort and costs.	Directing all the flow through one or several openings concentrates energy, increases velocities, and accelerates erosion.	• **Determine the proper number, location, alignment, and elevation of inlets.** When the streamflow is not naturally concentrated in a single wide channel, use multiple smaller culverts placed over the width of the affected area to spread the flow, decrease energy, and minimize erosion. • **Construct an upstream dike.** Where existing culverts cannot be changed, constructing an upstream dike will raise the water/sediment level, then drop the water safely to the existing culvert level. Materials that can be used for dikes include soil, rock, metal, concrete, or wood (Fig. 4).
Culverts seats are commonly excavated so that the culvert bottom rests on mineral soil below the natural grade of the stream bottom.	Excavated culverts keep the road dry and provide excellent bedding for the pipe; however, they also lead to upstream and downstream channel erosion. The culvert outfall is often unprotected and creates a scour hole, which lowers the channel and dries the surrounding riparian areas. In the upstream direction, side channel downcutting may occur, and upstream gullies may be formed. Further, the sediment lost by up- and downstream erosion will affect downstream water quality.	• **Place the bottom of the culvert at the natural level of the channel.** If proper bedding is a problem, excavate and refill to the natural level of the channel (Fig. 2.) • **Attach elbow at upstream dike.** The upstream end of a culvert can be raised by attaching a 45 to 90 degree elbow with the elbow inlet at the desired stream bottom. Allow sufficient freeboard on the fill to avoid overtopping the road. Proceed cautiously, however, because culvert elbows also change the characteristics of how water enters the culvert and may reduce its capacity under high flow conditions (Fig. 3). Water can sometimes flow along the exterior surface of the culvert, causing failure.
Culverts that are not properly aligned with the stream direction and gradient. Culverts that are too long, too steep, or too high at the outfall.	Culverts may accumulate sediments inside, divert water into streambanks, and cause erosion or impede fish passage.	• **Align culverts with stream direction and gradient to ensure that sediment passes through the culvert and that water is not directed against the streambank.** If fish passage is necessary, make sure the culvert openings allow passage, especially at outfalls.

Figure 2.—Raise culvert elevation to the natural level of the stream channel.

Before

Typical culvert placement, with culvert bottom below natural channel bottom, degrades channel both above and below road.

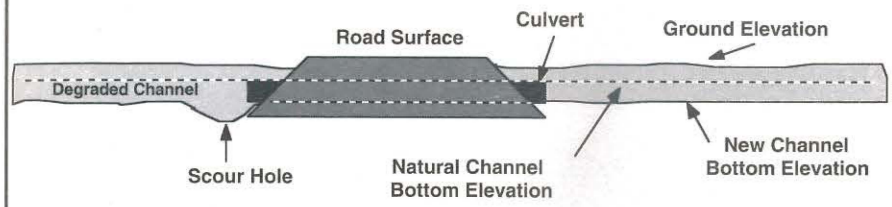

Lack of outfall protection commonly results in scour hole and further channel erosion.

After

Raising road bed and culvert to natural channel elevations, retards flow, causing sediment deposition and channel aggradation above culvert, thus recreating wetland area. Road acts as a dam, ponding sediment, slowing water runoff, and promoting infiltration.

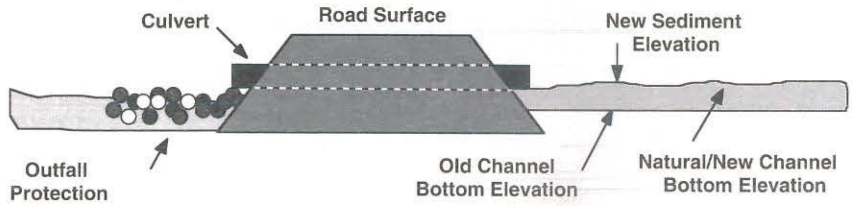

Protecting culvert outfall preserves channel bottom, preventing erosion of channel.

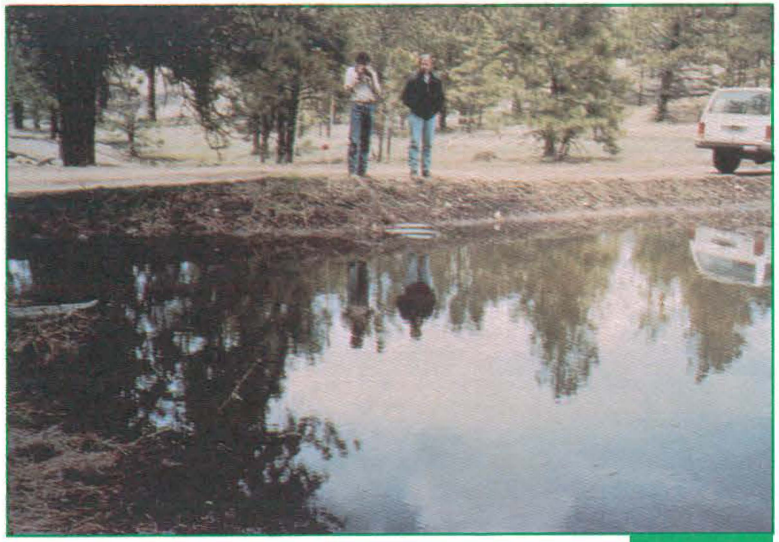

Raised culvert slows water and captures sediment following spring runoff June 14, 1991, on F.R. 480, Zuni Mountains, Mt. Taylor Ranger District, Cibola National Forest.

Figure 3.—Attach elbow to the upstream end of an existing culvert.

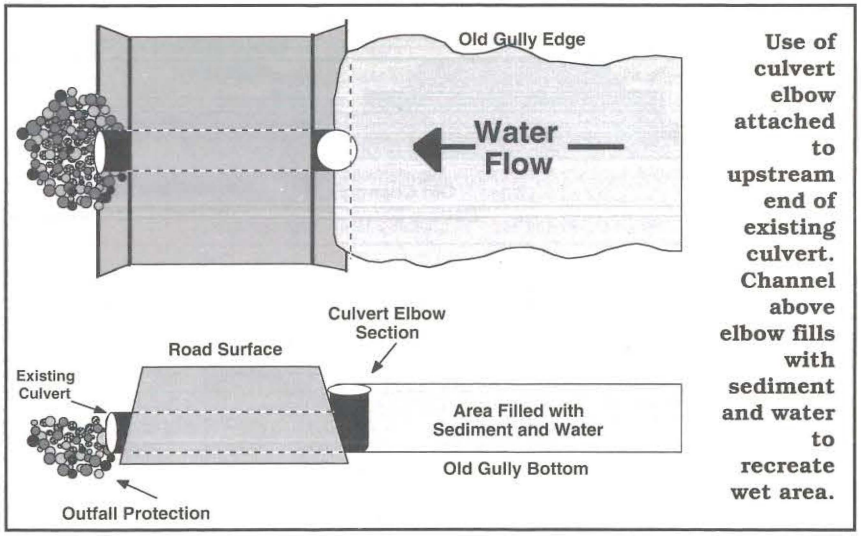
Old Gully Edge
Water Flow
Culvert Elbow Section
Road Surface
Existing Culvert
Area Filled with Sediment and Water
Old Gully Bottom
Outfall Protection
Use of culvert elbow attached to upstream end of existing culvert. Channel above elbow fills with sediment and water to recreate wet area.

Building inlet at mile 112.3, Vaqueros project, Jicarillo Ranger District, Carson National Forest.

Figure 4.—Construct an upstream dike using a concrete traffic barrier.

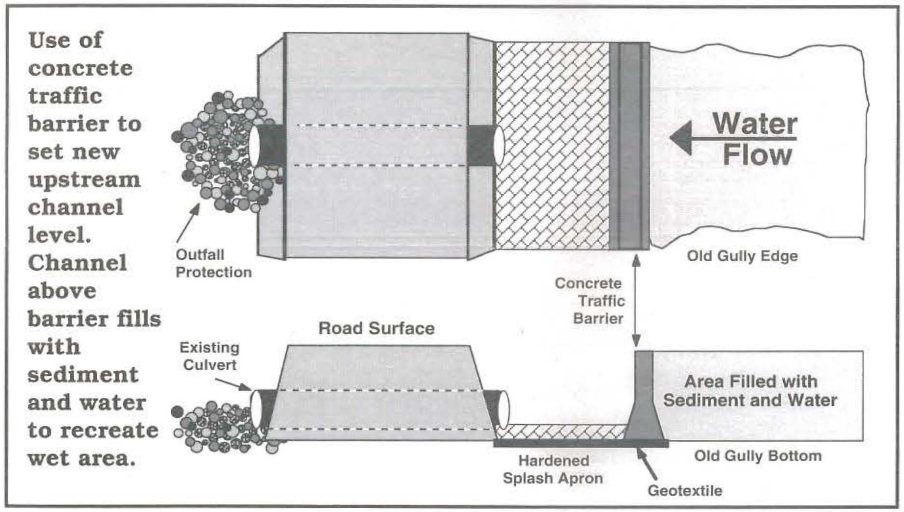
Use of concrete traffic barrier to set new upstream channel level. Channel above barrier fills with sediment and water to recreate wet area.
Water Flow
Outfall Protection
Old Gully Edge
Concrete Traffic Barrier
Road Surface
Existing Culvert
Area Filled with Sediment and Water
Hardened Splash Apron
Old Gully Bottom
Geotextile

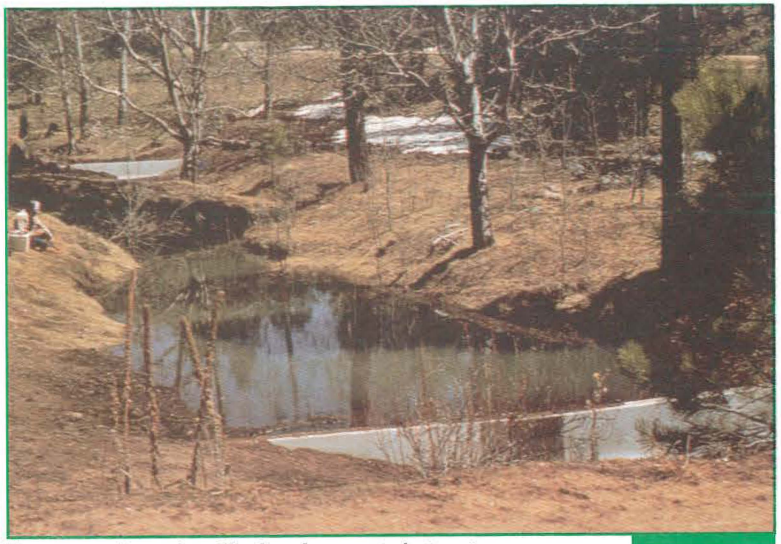

Upstream view of traffic barrier control structures April 6, 1988, Diener Canyon, Bluewater Creek, Cibola National Forest.

Upstream view of two traffic barrier control structures May 9, 1988, Diener Canyon, Bluewater Creek, Cibola National Forest.

Fords for Stream Crossings

Fords are often suitable crossings for shallow streams in which debris exists that could clog culverts and bridges. Chart 2 illustrates design problems common to traditional ford crossings. Several techniques are recommended to protect riparian areas around these crossings. A specific recommendation is illustrated in Figure 5.

CHART 2.—Retrofitting traditional ford crossings.

Common Mistake	Resulting Environmental Problem	Solutions
Fords are set below the natural grade.	The channel erodes both upstream and downstream from the structure.	• **Maintain the natural grade.** Extend the low water crossing far enough above the streambanks to keep high flow events from eroding the ends of the structure.
Failure to include a cutoff wall and splash apron in the design.	The lack of cutoff walls and aprons often results in the formation of a scour hole and eddies below the structure. These holes undermine the crossing, elevate maintenance costs, and eventually fail.	• **Install cutoff walls and splash aprons.** Constructing a cutoff wall at the downstream edge of the road surface and a splash apron at natural channel gradients downstream of the wall will prevent erosion and eddies that could undermine the crossing (Fig. 5).
Failure to design a ford large enough to accommodate high flows.	Unchecked high flows damage the structure and may cause erosion.	• **Provide sufficient channel capacity.** Construct the ford so that expected flows can pass without adversely affecting the structure.

Figure 5.—Design details for using fords across roads.

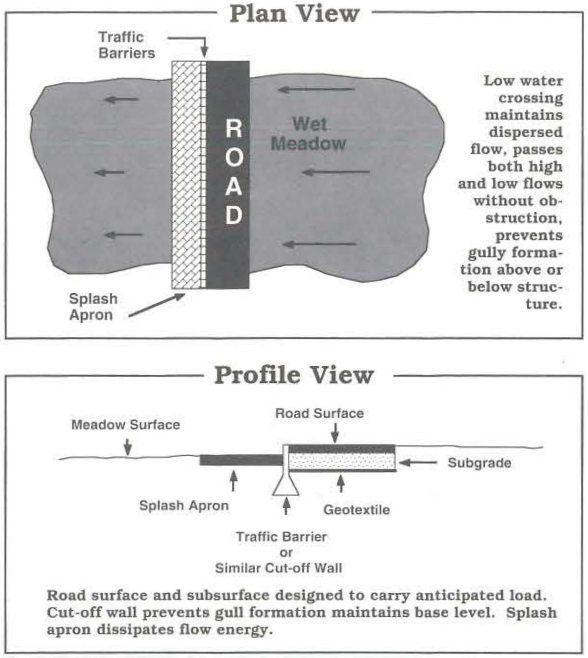
Plan View
Traffic Barriers
ROAD
Wet Meadow
Splash Apron
Low water crossing maintains dispersed flow, passes both high and low flows without obstruction, prevents gully formation above or below structure.
Profile View
Meadow Surface
Road Surface
Subgrade
Splash Apron
Geotextile
Traffic Barrier or Similar Cut-off Wall
Road surface and subsurface designed to carry anticipated load. Cut-off wall prevents gull formation maintains base level. Splash apron dissipates flow energy.

Upstream view of concrete ford that would benefit from increased elevation, cutoff wall, and splash apron.

Bridges for Stream Crossings

Bridges, though expensive, are the only choice for a crossing with high water levels, significant velocities, and large traffic loads. Chart 3 illustrates the problems that exist in traditional designs of bridge stream crossings. Several recommendations are made for protecting riparian areas in this situation.

CHART 3.—Retrofitting traditional bridge crossings.

Common Mistake	Resulting Environmental Problem	Solutions
The bridge opening may be too small to accommodate design flows or may have been designed for too small a flow.	Constricted flows above the bridge will reduce velocities, resulting in upstream sediment buildup, while accelerated water passage through the structure causes downstream erosion.	• **Provide sufficient channel capacity.** Construct a bridge opening that can carry expected runoff without constricting its flow. Avoid the temptation to construct a smaller opening to save initial costs. Future maintenance costs and damage to other resources may outweigh the higher initial cost of construction.
Bridge construction may be at an angle to the natural flow of the stream.	This construction forces the water to hit and erode the bank above the bridge and exit at an angle. Channelizing the stream to align it with the bridge will also cause soil erosion and damage to riparian areas.	• **Align bridge with stream channel.** Design location of the bridge according to the stream configuration, not vice-versa. Build the bridge at right angles to the flow, and avoid building bridges on curved stream reaches.

Wet Meadow Crossings

Wet meadows present a particular challenge to road design and maintenance. Significant amounts of fill material are required, and extensive drainage is needed if traditional engineering methods are used. These networks often require frequent maintenance. Chart 4 illustrates the problems in traditional designs of wet meadow crossing (see Fig. 6) and makes several recommendations for protecting wet meadow areas. Figures 7 and 8 illustrate specific recommendations.

Figure 6.—View of an improperly designed wet meadow crossing.

Plan View

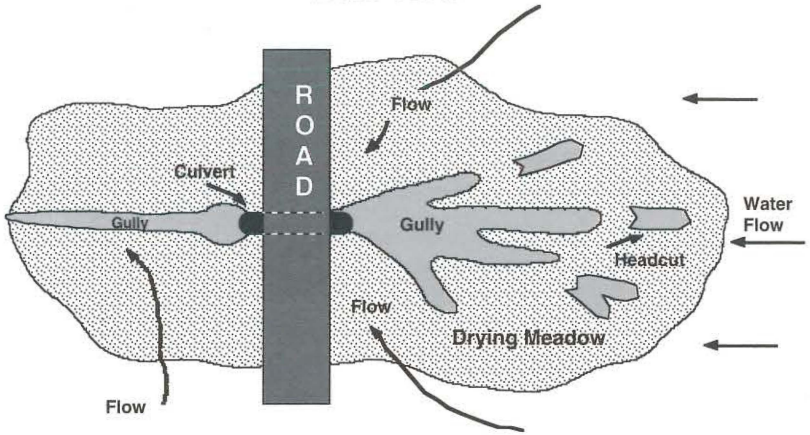

Crossing meadow with one culvert with pipe bottom below the original meadow surface, frequently with supplemental lead-in ditches. Gully network forms upstream of road and downstream too.

Profile View

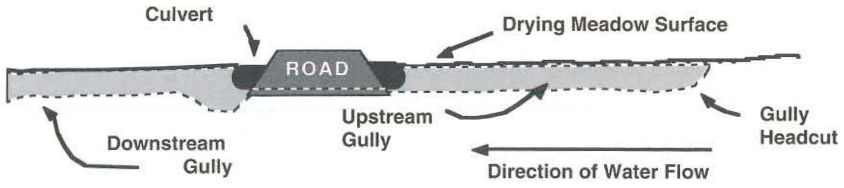

Concentration of formerly dispersed flow causes downstream gully. Gully formation above road due to culvert bottom below original meadow surface drains wet meadow as headcut migrates upstream.

Figure 7.—A properly designed wet meadow crossing.

Plan View

Avoid crossing wet meadows if at all possible. If this is not avoidable, use multiple culverts with bottom edges set at original meadow level, not below.

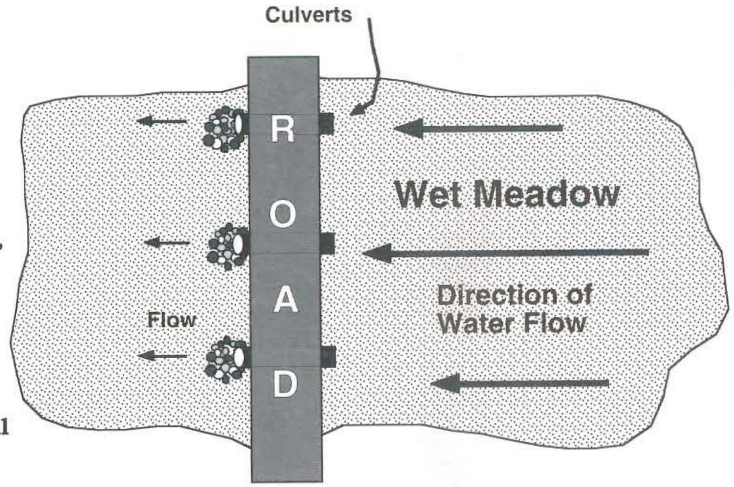

Multiple culverts across a meadow maintains dispersed flow rather than concentrating flow.

Profile View

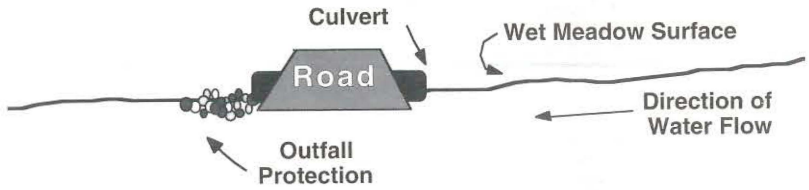

Setting culvert bottoms at level of original wet meadow surface prevents head cutting and dewatering of soil profile. Always protect outfall from erosion.

CHART 4.—Retrofitting wet meadow crossings.

Common Mistake	Resulting Environmental Problem	Solutions
Wet meadows are usually watered by surface and subsurface flows that are slow and dispersed. A road and its drainage structures tend to cut off dispersed water flows or to concentrate them and increase their velocities through one large culvert.	When the subsurface flow is removed, the rate of infiltration is reduced, the water table is lowered, and riparian vegetation is replaced by upland species or bare soil.	**• Select alternative routes at higher elevations.** The best solution to the adverse effects of roads on wet meadows is to avoid them altogether. **• Design crossings in concert with the environment.** If it is not possible to avoid crossing the meadow, use construction methods that have minimum effect on the area. Cross below or above the meadow instead of through it. Take advantage of local geologic features by crossing at natural pinch points, at grade, or at right angles to the flow (compare Figs. 6 and 7).
Drainage structures are commonly excavated to set on mineral soil, that is, below the natural grade of the meadow. This placement causes gullies to form above and below the width of the meadow.	The gullying gradually dries out the meadow as the channel deepens. The permanent water table is lost; and upland plant species begin to encroach on the formerly wet meadow, changing the vegetation composition, diversity, and productivity.	**• Disperse the flow rather than concentrate it.** Instead of one large culvert, locate several smaller culverts across the width of the meadow (See Fig. 7 and the photograph on p. 29). **• Use permeable fill.** Sometimes it is advantageous to use permeable fill or french drains. This technique consists of rock sandwiched between layers of geotextile. A french drain allows water to pass under the road and at the same time keeps the road surface dry. It may be used alone or in conjunction with a culvert designed to carry flood flows (Fig. 8).

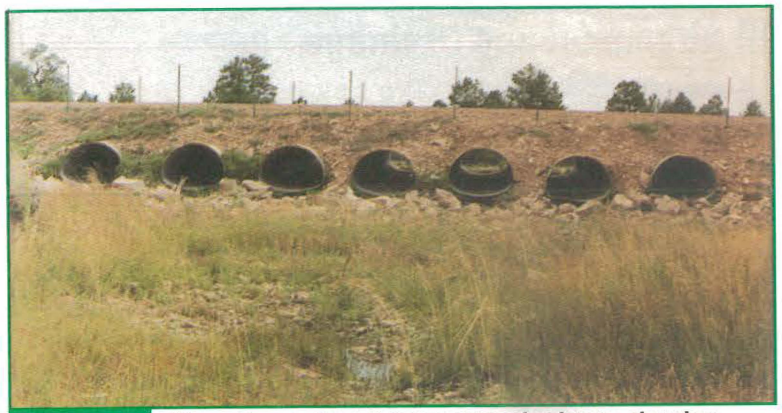

Downstream view of large array of culverts, showing outfall protection (rock rip and rap) and initial rewetting of lower meadow.

Figure 8.—Use of permeable fill to cross a wet meadow.

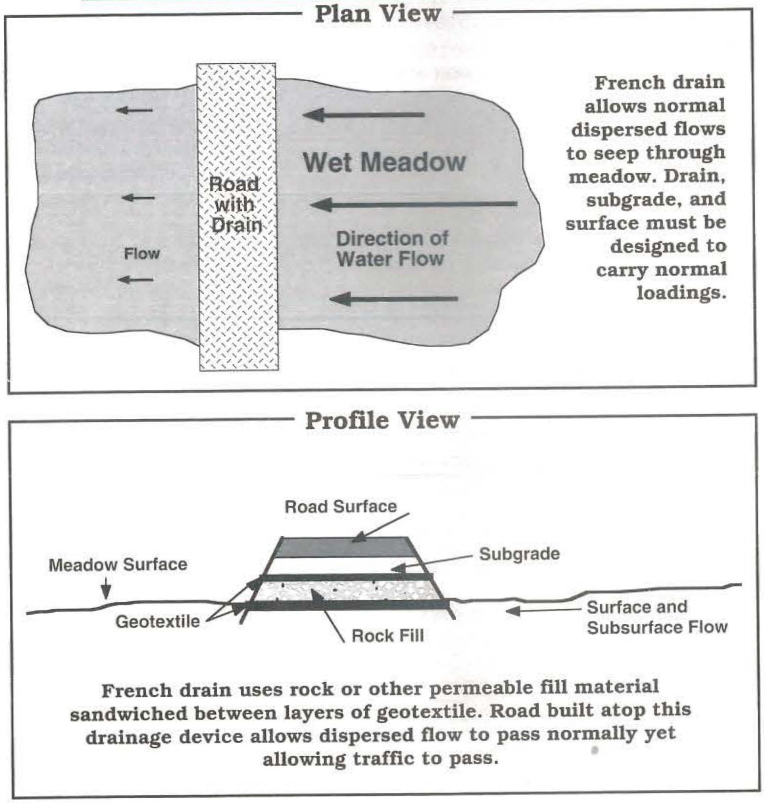

French drain uses rock or other permeable fill material sandwiched between layers of geotextile. Road built atop this drainage device allows dispersed flow to pass normally yet allowing traffic to pass.

Road Alignment and Drainage

Chart 5 illustrates problems that often exist in traditional designs for road alignment and drainage.

CHART 5.—Road alignment and drainage.

Common Mistake	Resulting Environmental Problem	Solutions
Road Alignment	Many roads follow and cross streams and riparian areas. These roads take up a significant portion of the total riparian area, replace natural vegetation with an impermeable surface, and increase runoff and flood peaks, which allow increased pollutant loads to reach the stream. These roads cut off or shorten stream meanders and steepen the stream gradient, thereby increasing its power and causing erosion and downstream sedimentation.	• **Do not build in riparian areas.** Although initial construction costs may be higher for roads built on ridges or sideslopes, long-term maintenance costs and riparian damage will be less. • **Align roads in concert with the environment.** Minimize the number of stream and riparian crossings. Where crossings are unavoidable, construct them at right angles. Maintain naturally occurring stream meanders to keep a natural gradient with the stream. Design and construct roads to detain or delay water and sediment above the road to reduce flow velocity, increase infiltration, and prolong base flows below the road.
Road Drainage	Drainage from roads, especially from ditch lines, can affect nearby riparian areas. Infrequent drainage allows water to travel for long distances in ditches, gaining velocity and sediment loads and simultaneously reducing flow to meadows. Drainage outlets too close to channels can direct pollutant-laden water directly into the stream. Wing ditches and berms along roads frequently disrupt natural flow lines and concentration. Drainage outlets on fill materials commonly cause significant erosion, and unprotected culvert outlets cause scour and additional sedimentation. Too much maintenance can remove erosion-resistant vegetation or rock armor, undermine stable banks, and increase erosion and sedimentation.	• **Design road drainage system in concert with the environment.** Design outsloped roads and rolling dips and avoid inside ditches. Drain the road frequently to avoid concentrating water in ditches or at any single culvert. Protect drainage outlets against erosion by placing the outlet at the gradient of the channel bottom and installing energy dissipaters at the outfall. Avoid placing outlets on fill material. Avoid directing accumulated ditch waters and sediment into streams. Direct ditch waters to areas that allow the water to infiltrate and sediments to be deposited before they reach the stream. Sedimentation basins may be needed. Avoid intercepting subsurface flow with ditch. • **Avoid excessive maintenance.** Vegetation in the ditch can help stabilize the ditch and cut slope, which prevents erosion in both areas. ▮

Conclusion

MANY OF THE TECHNIQUES RECOMMENDED IN THIS GUIDE are relatively simple and low in costs. In most cases, the benefits of adjusting these designs easily outweigh the costs. Further, these practices can be initiated with little research and development. Awareness is the key to successful road management in riparian areas.

Help is Available

Working with other agencies and officials involved with, or responsible for, road maintenance and environmental protection is a good way to avoid problems. Share your ideas and experience. Consult the following agencies and groups before undertaking road work in riparian areas.

- *State Water Quality Agencies.* Under Section 401 of the Clean Water Act, these agencies are responsible for issuing special water quality certification for any work to be done in a riparian or wet area. Special conditions or procedures may be applicable in certain situations. Some coastal states may have new road construction requirements and guidelines stemming from the Coastal Zone Act Reauthorization Amendments. Roads located in urban areas may be subject to federal stormwater runoff permit requirements.
- *U.S. Army Corps of Engineers.* Section 404 of the Clean Water Act charges the Corps to protect wetlands through a permit system. A special permit is needed if work is to be done in a river

or wetland area and results in placing dredged or fill material in the river or wetland.

- *U.S. Department of Agriculture, Forest Service, and Soil Conservation Service.* Watershed and engineering personnel may be able to help you translate ideas from this guide into workable designs for your specific local needs.
- *State Highway Administrations or Transportation Bureaus.* Transportation agencies may apply technical guidelines for road construction if the local road receives state or federal cost-share funding.
- *Local service organizations and environmental groups.* Groups, nonprofit organizations, or ad hoc associations, such as nature or bike trail organizations, wildlife clubs, citizen groups, and service clubs may volunteer labor or other resources for special projects to enhance riparian systems. ▮

High Clark Meadow, Luna Ranger District, Gila National Forest. Highly productive riparian area following placement of small structures, seeding, and proper grazing management. This photograph was taken 20 years after the restoration was accomplished.

GLOSSARY

Aquatic Ecosystem: the stream channel, lake, or estuary bed; water, fish, insects, and aquatic plant communities; and their habitats (rocks, pools, riffles, and the bottom substrate of sand or gravel).

Culvert: pipe placed under roads for carrying water. Culverts are often round, but may be other shapes as well.

Cutoff Wall: normally a concrete wall installed downstream of culverts to keep water and materials in place.

Downcutting: Water erosion that deepens an existing channel or forms a new channel where one did not previously exist. Downcutting distinguishes between downward and lateral erosion.

Freeboard: the height above the recorded high-water mark of a structure associated with water.

Fords: low water crossings over roads. Often used where flow is rarely high enough to prevent vehicles from crossing through the water.

Inlet: the upstream end of a culvert, sometimes called an invert.

Outfall: the downstream end of a drain or culvert; in general, the outlet of a body of water.

Permeable Fill: rock placed between layers of fiber material to allow water to pass through underground; sometimes called a french drain.

Riparian Areas: transitional land and water areas composed of, and located between, two ecosystems: upland ecosystems and aquatic ecosystems.

Riparian Ecosystem: the land-based or terrestrial community characterized by hydric (moist) soils and plant species dependent on the water table (saturated zone) or its capillary fringe.

Splash Apron: typically a concrete or rock structure placed at the outlet of a culvert, drop structure, channel, or ford to intercept the force of the water by slowing velocity and preventing scour holes.

Wet Meadows: meadows characterized by wet soils and slow surface and subsurface flows. Channels are typically poorly defined or nonexistent. Vegetation is dominated by riparian-dependent species. ▮